NOTES:


- 1. ALLOWABLE OPTICAL MATERIAL: SCHOTT: ZERODUR 542/562
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO < 3 ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)

\$1: PROTECTED GOLD Ravg ≥ 94% 700-800nm @ 0° AOI Ravg ≥ 97% 800-2,000nm @ 0° AOI

S2: NONE

4.\ ARROW ON EDGE POINTING TOWARDS SURFACE \$1.

5. FINE GROUND SURFACE

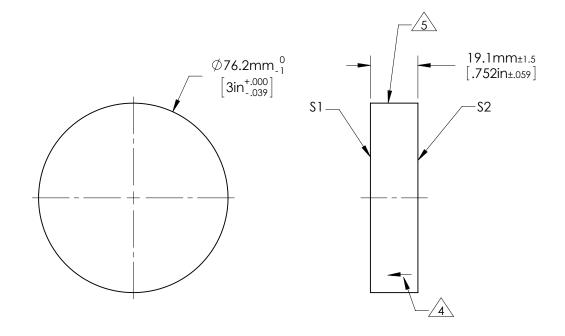

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SHAPE	S1 PLANO	S2 PLANO	EFL (AT 587.6nm)	NA	R	Edmund Optics®
SURFACE ACCURACY AT 632.8nm	1/10 WAVE	NA	BFL (AT 587.6nm)	NA		
SURFACE QUALITY	60 - 40	COMMERCIAL POLISH			TITLE	1/10λ Optical Flat, Zerodur, 3inch Diameter PROTECTED GOLD
CLEAR APERTURE	Ø 68.6	Ø 68.6				
BEVEL MAX FACE	1.0 x 45°	1.0 x 45°	ALL DIMS IN	mm	DWG NO	31391-566