




NOTES:

- 1. SUBSTRATE : FUSED SILICA
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
S1: UNCOATED

S2: UNCOATED

3. FINE GRIND SURFACE


- 4. RoHS COMPLIANT

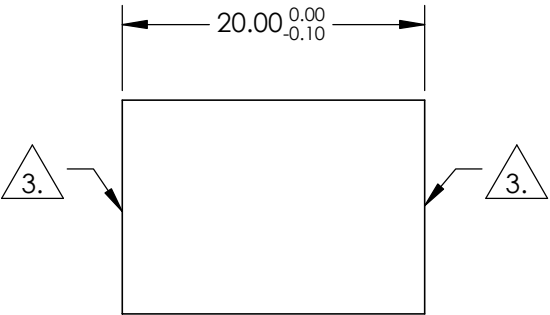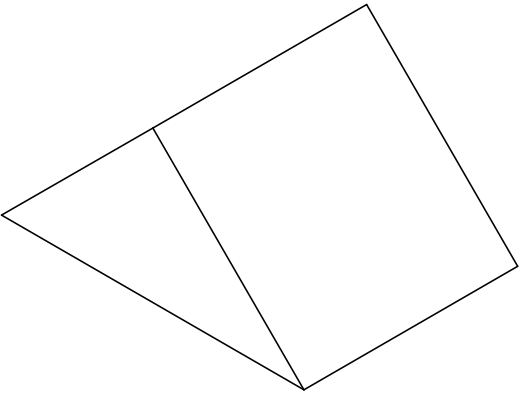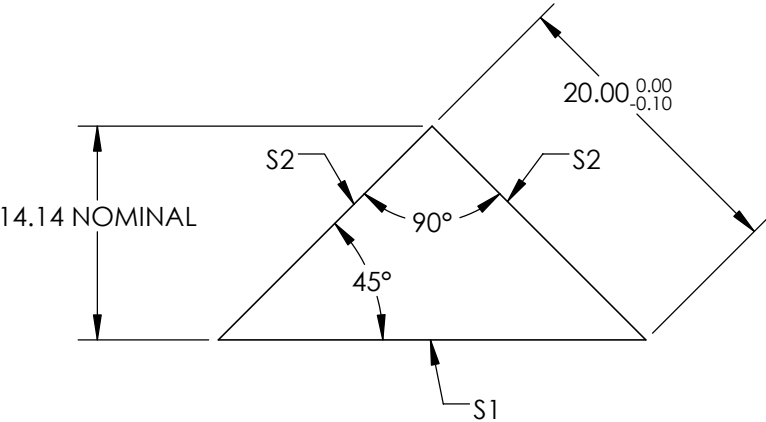


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
ANGLE TOLERANCE (arcsec)	±40	±40
PYRAMID TOLERANCE (arcmin)	±1	±1
SURFACE QUALITY	20-10	20-10
SURFACE FLATNESS	λ/10	λ/10
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

**Edmund Optics®**

TITLE	20mm UNCOATED, FUSED SILICA HIGH TOLERANCE RA PRISM		
DWG NO	47790	SHEET 1 OF 1	