
NOTES:

- 1. SUBSTRATE: N-BK7
- 2. S2 TO BE PARALLEL WITH S1 TO <30 arcsec
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: RAVG ≤1.75% @ 400 - 700nm
- 4. FINE GRIND SURFACE
- 5. Rohs Compliant

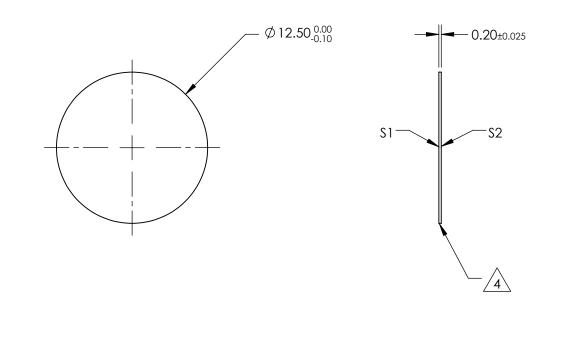

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

. .

.

| | | | | | | Edmund Optic | C ® |
|------------------|----------------------|----------------------|-------------|----|--------|--|-----------------|
| | S1 | S2 | | | | | 5 |
| SHAPE | PLANO | PLANO | THIRD ANGLE | | TITLE | 12.5mm DIAMETER MGF2 COATED, ULTRA- THIN N-BK7 WINDOW | |
| SURFACE QUALITY | 20-10 | 20-10 | | | | | |
| WAVELENGTH RANGE | 400 - 700nm | 400 - 700nm | | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | ALL DIMS IN | mm | DWG NO | 66194 | SHEET 1 OF 1 |