



NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR (400-1000nm)
R(ABS) $\leq 0.25\%$ @ 880nm
R(AVG) $\leq 1.25\%$ @ 400 - 870nm
R(AVG) $\leq 1.25\%$ @ 890 - 1000nm



3. FINE GROUND SURFACE

4. RoHS COMPLIANT

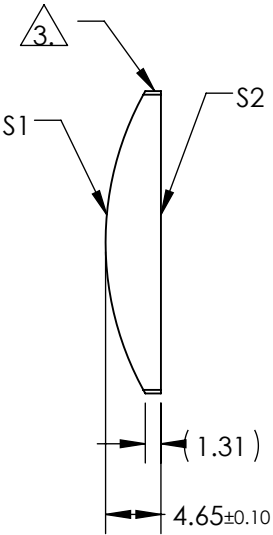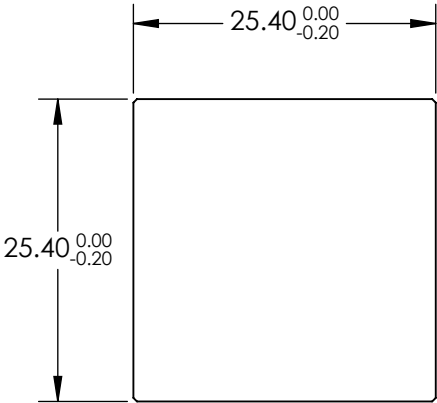

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | | | | | | | |
|-----------------|----------------------|----------------------|---|-------|---|---|-----------------|
| | S1 | S2 | EFL | 50 |  Edmund Optics® | | |
| SHAPE | CONVEX | PLANO | BFL | 46.93 | | | |
| RADIUS | 25.84 | INFINITY |  | | TITLE | 25.4mm H X 25.4mm L X 50mm FL VIS-NIR, CYLINDER LENS | |
| SURFACE QUALITY | 60-40 | 60-40 | | | | | |
| CLEAR APERTURE | 22.86 x 22.86 | 22.86 x 22.86 | ALL DIMS IN | | DWG NO | 36222 | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | | | | | |
| | | | mm | | | | SHEET 1 OF 1 |