

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 36° 52' NOMINAL BLAZE WAVELENGTH: 1000nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



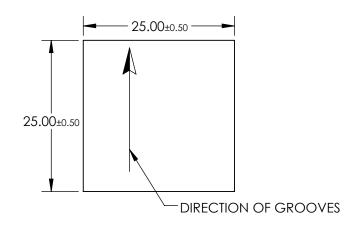



FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

8	Edmund	Optics®

				1		GRATING DIFF 1200GR 10	100nm 25 x 25
	\$1	\$2	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION		OK/ (111 VO BIT 1200 CK 1000 TIT 20 X 20	
SHAPE	PLANO	PLANO					CLIFET
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5	ALL DIMS IN	mm	DWG NO	43754	SHEET 1 OF 1