## NOTES:

1. SUBSTRATE: FUSED SILICA


2. COATING:

\$1: R(AB\$) >99.80% @ 355nm @ 0-45° AOI DAMAGE THRESHOLD, PULSED: 5J/cm² @ 355nm, 20ns, 20Hz DAMAGE THRESHOLD, CW: 1MW/cm² @ 355nm


S2: NONE

3. FINE GRIND SURFACE

4. RoHS: COMPLIANT



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

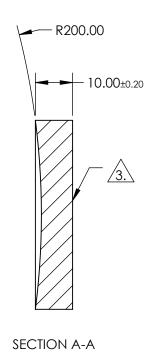

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	EFL: 100mm		Edmund Optics®
SHAPE	CONCAVE	PLANO	BFL: N/A		
SURFACE QUALITY	20-10	FINE GRIND			50.8mm Dia. x 100mm EFL, 355nm 0-45°,
SURFACE FLATNESS	3λ/20	N/A	THIRD ANGLE PROJECTION	TITLE	Concave Laser Line Mirror
CLEAR APERTURE	Ø45.72	N/A			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	11333 SHEET 1 OF 1