## NOTES:

1. SUBSTRATE:

Fused Silica

2. COATING (APPLY ACROSS COATING APERTURE):


\$1 & \$2: NONE

3. EFFECTIVE FOCAL LENGTH: 46.70 mm


4. DIVERGENCE ANGLE: ±0.25 °


5. WAVELENGTH RANGE (nm): 200 - 2200

6. ROHS: COMPLIANT



DETAIL A

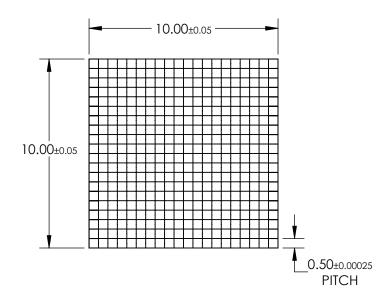

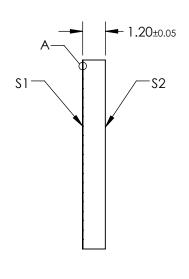

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

## **Edmund Optics®**

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 500µm Pi 0.25° Divergence	crolens Array 10 x 10mm, 500µm Pitch, 0.25° Divergence	
ALL DIMS IN	mm	DWG NO	64483	SHEET 1 OF 1	

