


NOTES:

- 1. CONSTRUCTION: Black Anodized Aluminum
- 2. MOUNT: 36 TPI 55° Whitworth (DIN Objective)
- 3. TRAVEL(mm): Pinhole: ±3 in X-Axis and Y-Axis Objective: 19 in Z-Axis
- 4. ACCURACY(um): 2.5 in Z-Axis
- 5. LEADSCREW THREAD: 50.8 TPI in X-Axis and Y-Axis

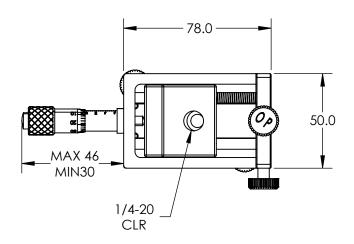





FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| | | B | Edmund Optic | S [®] |
|------------------------|------------------|--------|-------------------------|-----------------|
| THIRD ANGLE PROJECTION | $\bigoplus \Box$ | TITLE | Spatial Filter Movement | |
| ALL DIMS IN | mm | DWG NO | 39976 | SHEET 1 OF 1 |