

NOTES:

1. SUBSTRATE:
LIBA 2000+
2. CENTERING TOLERANCE (AT 587.6nm): BEAM DEVIATION (HALF ANGLE): <25 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)
S1: R(AVG) ≤ 0.5% FROM 600-1050nm @ 0° AOI
S2: R(AVG) ≤ 0.5% FROM 600-1050nm @ 0° AOI

4. EDGE: AS MOLDED



5. ASPHERIC SURFACE DESCRIBED BY THE FOLLOWING EQUATION AND COEFFICIENTS SHOWN IN TABLE BELOW

$$Z(Y) = \frac{\left(\frac{1}{\text{RADIUS}}\right) * Y^2}{1 + \sqrt{1 - (1+k) * \left(\frac{1}{\text{RADIUS}}\right)^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14} + M * Y^{16}$$


6. RoHS: COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

COEFFICIENT TABLE 5.	
	S1
Semi-diameter	15.0
Coefficient (1/RADIUS)	7.990766E-02
k	-1.078013E+00
D	0.000000E+00
E	3.525273E-05
F	3.436363E-08
G	6.850801E-11
H	0.000000E+00
J	0.000000E+00
L	0.000000E+00
M	0.000000E+00

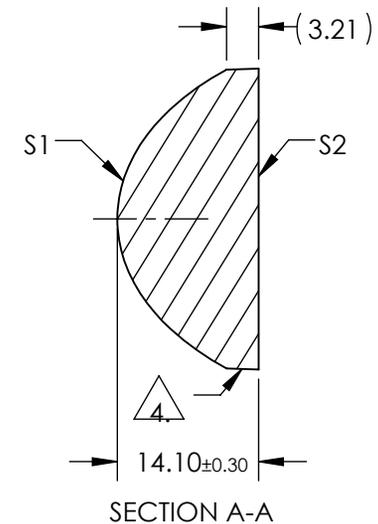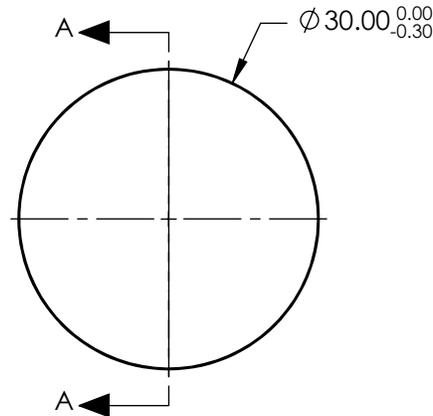

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL: 24.00		
SHAPE	CONVEX	PLANO	BFL: 14.73		
RADIUS	12.514	∞	THIRD ANGLE PROJECTION 	TITLE	LENS CONDENSER 30mm X 24mm NIR I TS
SURFACE QUALITY	As Molded	As Molded	ALL DIMS IN	DWG NO	15733
CLEAR APERTURE	Ø26.78	Ø26.78	mm	SHEET 1 OF 1	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED			