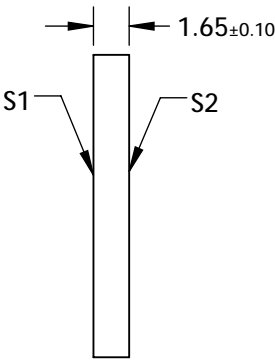
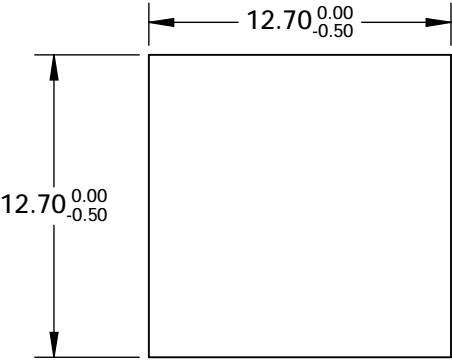





- NOTES:
- SUBSTRATE MATERIAL:
B270
 - SURFACE S1 TO BE PARALLEL TO SURFACE S2 TO WITHIN <3 ARCMIN
 - COATING (APPLY ACROSS COATING APERTURE)
 S1: Square Aluminum (AlMgF2) Apertures
 R: 50±5% @ 400 - 2000nm @ 45° AOI
 T: 50±5% @ 400 - 2000nm @ 45° AOI
 S2: NONE
 - POLKA DOT CENTER TO CENTER SPACING : 0.15mm
 POLKA DOT MINIMUM APERTURE: 2mm
 - ROHS : COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION 	TITLE	12.7mm SQ 50R/50T, VIS-NIR POLKA-DOT BEAMSPLITTER	
SURFACE QUALITY	80-50	80-50		DWG NO	15982	SHEET 1 OF 1
CLEAR APERTURE	90%	90%				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED		ALL DIMS IN	mm	