#### NOTES:


### 1. SUBSTRATE MATERIAL: N-BK7

## 2. ROHS COMPLIANT

3. COATING (APPLY ACROSS CLEAR APERTURE) S1: R(AVG) > 98% @ 340 - 488nm @ 0°, ALL POLARIZATIONS R(AVG) > 98% @ 320 - 450nm @ 45°, ALL POLARIZATIONS R(AVG) > 99% @ 320 - 450nm @ 45°, S-POLARIZATION

S2: NONE

# 4. FINE GRIND SURFACE

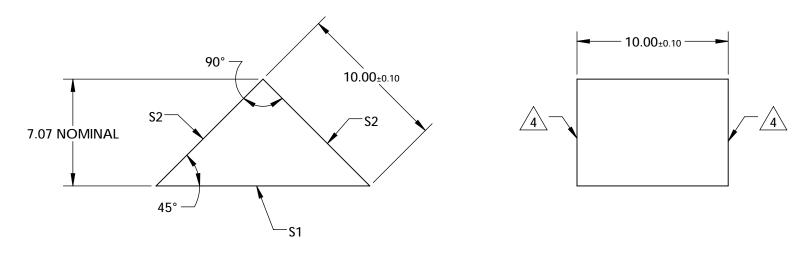

# FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

# SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2					
SHAPE	PLANO	PLANO				Edmund Ontic	<b>N</b> R
ANGLE TOL. (arcmin)	±2	±2				Edmund Optic	<b>、</b> ろ °
SURFACE QUALITY	40-20	40-20			TITLE	10.0mm 320 - 450nm COATED, N-BK7 RIGHT ANGLE MIRROR	
SURFACE FLATNESS	λ/8	λ/8					
CLEAR APERTURE	90%	90%					
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	15594	SHEET 1 OF 1

