

[See all 10 Products in Family](#)

**TECHSPEC® 20mm NIR, Polarizing Cube Beamsplitter**



TECHSPEC® Broadband Polarizing Cube Beamsplitters

Stock **#49-871** [CONTACT US](#)

⊖ 1 ⊕ **A\$488<sup>00</sup>**

**ADD TO CART**

Volume Pricing	
Qty 1-5	<b>A\$488.00</b> each
Qty 6-25	<b>A\$390.40</b> each
Qty 26-99	<b>A\$366.00</b> each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

Linear Polarizer **Type:**

**Physical & Mechanical Properties**

90 **Clear Aperture (%):**

Cube **Construction:**

20.0 x 20.0 x 20.0 ±0.1  
Dimensions (mm):

## Optical Properties

±3  
Beam Deviation (arcmin):

R<sub>avg</sub> <0.5% @ 700 - 1100nm  
Coating Specification:

500:1  
Extinction Ratio:

>90  
P-Polarization Transmission (%):

>99  
S-Polarization Reflection (%):

N-SF11  
Substrate: □

40-20  
Surface Quality:

700 - 1100  
Wavelength Range (nm):

1.25  
Power (fringes) @ 632.8nm:

0.25  
Irregularity (fringes) @ 632.8nm:

## Regulatory Compliance

Compliant  
RoHS 2015:

View  
Certificate of Conformance:

Compliant  
Reach 247:

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume


Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details

- Visible and NIR Coating Options Offered
- 500:1 Extinction Ratio
- AR Coated for <0.5% reflection per surface

TECHSPEC® Broadband Polarizing Cube Beamsplitters split randomly polarized light into two orthogonal, linearly polarized components. These beamsplitters offer transmission greater than 90% for P-polarized light and reflection greater than 99% for S-Polarized light across the entire design wavelength range. Each beamsplitter consists of a pair of precision high tolerance [right angle prisms](#) cemented together with a dielectric coating on the hypotenuse of one of the prisms. TECHSPEC® Broadband Polarizing Cube Beamsplitters have an anti-reflection (AR) coating applied to each face of the beamsplitter to achieve less than 0.5% reflection per surface. The beamsplitters are offered with both visible and NIR coatings.

## Technical Information

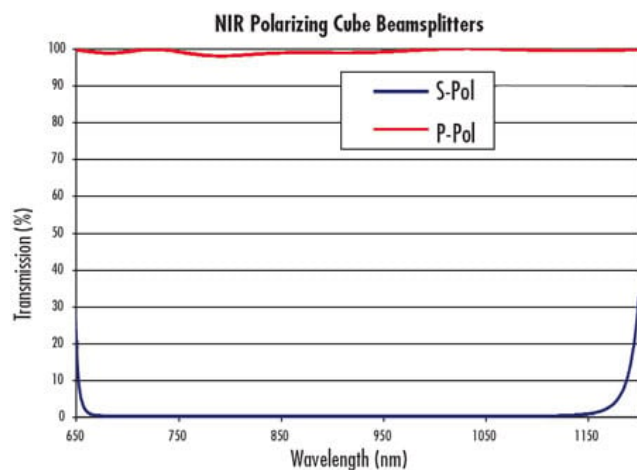



---

;