25.4mm Diameter x 25.4mm FL, MgF_2 Coated, PCX Condenser Lens

Stock **#15-535** **7 In Stock**

Other Coating Options

- 1 + **A$108.80**

ADD TO CART

Volume Pricing	
Qty 1-10	**A$108.80** each
Qty 11-49	**A$96.00** each
Need More?	Request Quote

Product Downloads

SPECIFICATIONS

General

Type:	Condenser Lens

Physical & Mechanical Properties

Diameter (mm):	25.40 +0.2/-0.4
Centering (arcmin):	≤25
Center Thickness CT (mm):	7.11 ±0.38
Bevel:	Protective as needed
Shape of Back Surface:	Plano

Optical Properties

Effective Focal Length EFL (mm):	25.40
Numerical Aperture NA:	0.50
Substrate:	Float Glass
Focal Length Tolerance (%):	±7
Coating:	MgF_2 (400-700nm)
Coating Specification:	R_{avg} ≤ 1.75% @ 400 - 700nm
Surface Quality:	80-50 (typical)
f/#:	1.00
Radius R_2 (mm):	Plano
Wavelength Range (nm):	400 - 700
Conjugate Distance:	Infinite

Regulatory Compliance

RoHS 2015:	Compliant
Certificate of Conformance:	View
Reach 235:	Compliant

PRODUCT DETAILS

- Molded Illumination Lenses
- Aspheric or Spherical Designs
- High Numerical Apertures

Condenser Lenses are molded lenses designed for illumination applications. Featuring large apertures and short focal lengths, Condenser Lenses are commonly used in emitter-detector applications, projection applications, or condensing illumination applications such as Koehler Illumination. The Aspheric Condenser Lenses are molded on the aspheric surface and ground and polished on the opposite face, offering superior performance. The Plano-Convex (PCX) Condenser Lenses are molded on both surfaces, offering excellent value.

TECHNICAL INFORMATION

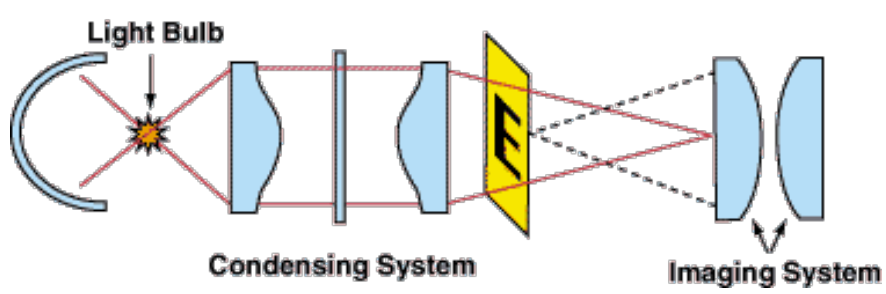

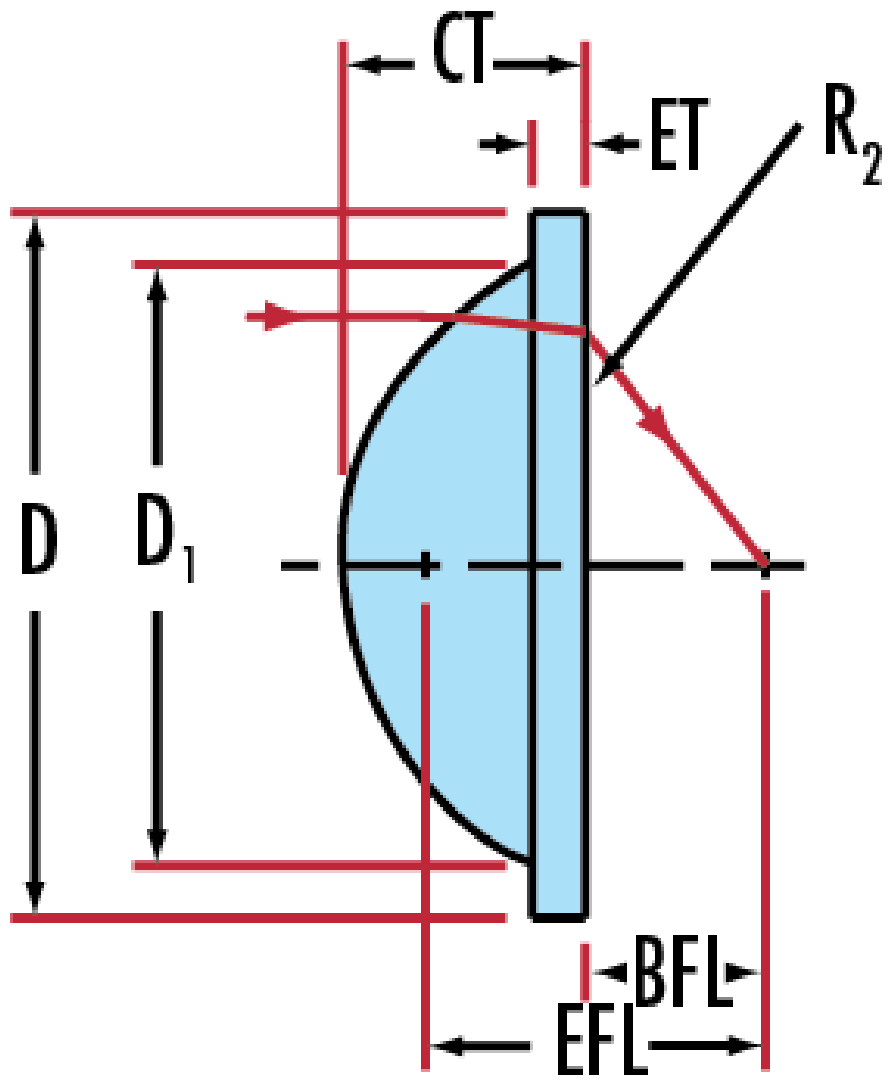

COATING CURVES