

[See all 70 Products in Family](#)

TECHSPEC® 25mm Diameter, 1064nm V-Coat, $\lambda/4$ N-BK7 Window

See More by [SCHOTT Optical Components](#)



Stock **#49-151** **8 In Stock**

⊖ 1 ⊕ A\$187⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-5	A\$187.20 each
Qty 6-25	A\$150.40 each
Qty 26-49	A\$140.80 each
Need More?	Request Quote

Product Downloads

General

Laser Line Window **Type:**

Physical & Mechanical Properties

22.50 **Clear Aperture CA (mm):**

25.00 +0.00/-0.25 **Diameter (mm):**

4.00 ±0.20	Thickness (mm):
≤1	Parallelism (arcmin):
Protective as needed	Bevel:
90	Clear Aperture (%):
Fine Ground	Edges:
0.21	Poisson's Ratio:
82	Young's Modulus (GPa):
610.00	Knoop Hardness (kg/mm²):

Optical Properties

Laser V-Coat (1064nm)	Coating:
1064	Design Wavelength DWL (nm):
N-BK7	Substrate: <input type="checkbox"/>
1.516	Index of Refraction (n_d):
60-40	Surface Quality:
64.17	Abbe Number (v_d):
R _{abs} <0.25% @ 1064nm	Coating Specification:
λ/4	Surface Flatness (P-V):

Material Properties

2.51	Density (g/cm³):
7.1 (-30 to +70°C) 8.3 (+20 to +300°C)	Coefficient of Thermal Expansion CTE (10⁻⁶/°C):

Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 235:

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:


- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Product Details

- <0.25% Reflection at Design Wavelength
- Coatings Available for HeNe, Diode, and Nd:YAG Laser Sources
- Precision N-BK7 Substrate
- Also Available [Uncoated](#), [MgF₂ Coated](#) and [VIS 0° Coated](#)


TECHSPEC® λ/4 N-BK7 Laser Line Windows are ideally suited for industrial and low power laser applications. The high tolerance design yields minimal beam distortion and scatter. Anti-reflection coatings provide <0.25% reflection at the coating's design wavelengths.

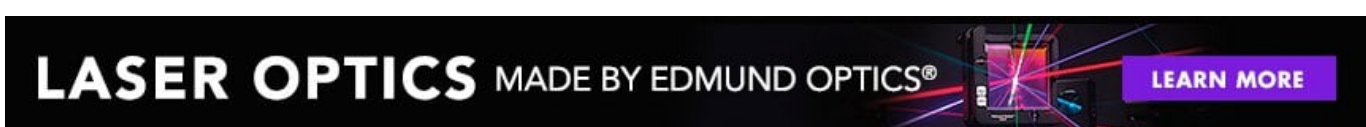

LASER OPTICS MADE BY EDMUND OPTICS®

[LEARN MORE](#)

Technical Information

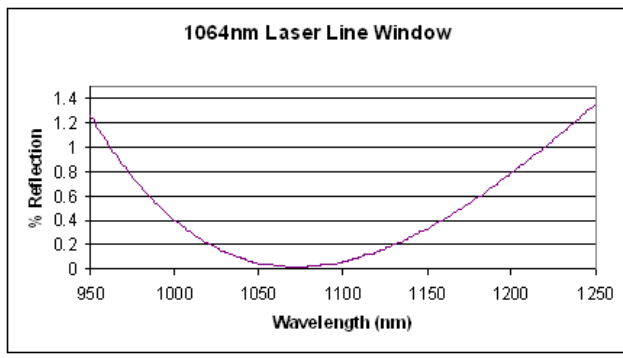

Compatible Mounts
