See all 13 Products in Family

TECHSPEC® T-Mount, 60mm x 85mm Plate Mount, ¼-20

Stock **#65-982** **1 In Stock**

- 1 + **A$848**.00

ADD TO CART

Volume Pricing	
Qty 1-4	**A$848.00** each
Qty 5-9	**A$791.36** each
Qty 10-25	**A$752.32** each
Need More?	Request Quote

Product Downloads

General

Function:
Optic Mount (Fixed)

Type of Optics:
Rectangular

Note:
Includes four T-Mount Aperture Caps (#66-037)

Dimensions of Compatible Optics (mm):
60.0 x 85.0

Physical & Mechanical Properties

Dimensions (mm):
75.0 x 75.0 x 75.0

Extension Length (mm):
75.0

Min. Thickness of Compatible Optics (mm):
1.0

Max. Thickness of Compatible Optics (mm):
7.1

Threading & Mounting

Thread Type:
T-Mount

Compatible Post:
¼-20

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 233:
Compliant

Product Details

- C, S, and T-Mount Solutions for Mounting Cube and Plate Beamsplitters, Filters, and Mirrors
- Provides a 90° Mounting Interface
- ¼-20 and M6 Tapped Mounting Threads for English or Metric Based Systems

TECHSPEC® C, S, and T-Mount Cube and Plate Mounts allow for the integration of cube and plate optics into C, S, and T-Mount systems. These mounts feature four C, S, or T-Mount threaded apertures that can also act as connection points for other C, S, or T-Mount components. Either an M6 or 1/4-20 tapped hole is provided on the base for post mounting, making these mounts compatible with breadboard and benchtop systems. TECHSPEC C, S, and T-Mount Cube and Plate Mounts provide a 90° mounting interface ideal for placing beamsplitters, filters, and mirrors within a system. C, S, and T-Mount Aperture Caps are available to block light from unused openings and to protect the optic from dust and debris.

Note: #11-139 and #11-142 each include one S-Mount Aperture Cap (#11-137)

Technical Information

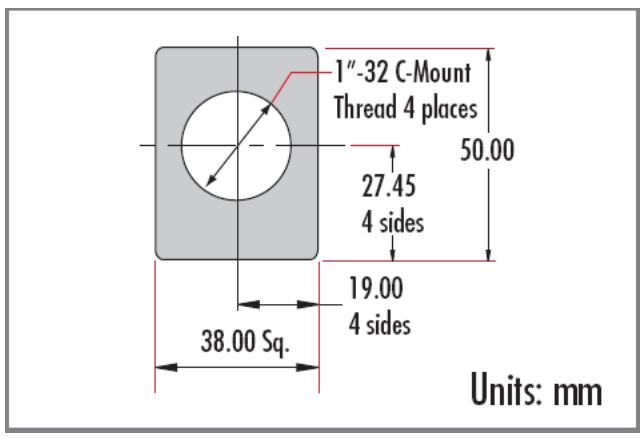

;