


NOTES:

1. SUBSTRATE:
N-BK7
2. COATING (APPLY ACROSS COATING APERTURE)
S1: ALUMINUM WITH PROTECTED OVERCOAT
R(AVG)>85% FROM 400-700nm, @ 45° AOI

S2: NONE

3. FINE GRIND SURFACE

4. RoHS COMPLIANT

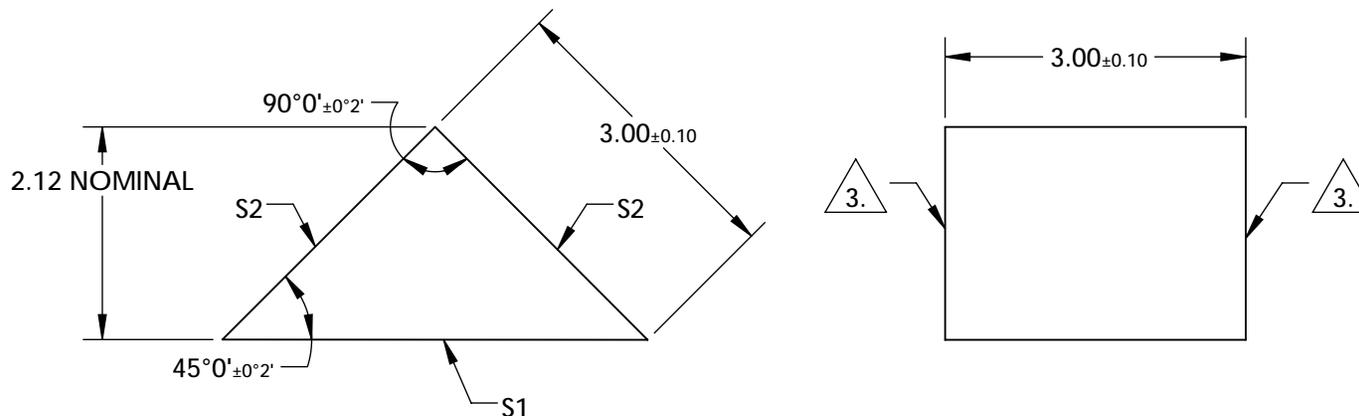

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	3.78 x 2.7	2.7 x 2.7
COATING APERTURE	3.78 x 2.7	2.7 x 2.7
SURFACE FLATNESS	$\lambda/4$	$\lambda/4$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

TITLE	3mm, Aluminum Coated, N-BK7 Right Angle Prism
DWG NO	47920
SHEET 1 OF 1	