

[See all 36 Products in Family](#)

## 0.6 OD 100 x 300mm, Neutral Density Filter



Stock #84-001 **13 In Stock**

- 1 + A\$888.<sup>00</sup>

**ADD TO CART**

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-10       | A\$888.00 each                |
| Qty 11-49      | A\$758.40 each                |
| Need More?     | <a href="#">Request Quote</a> |

### Product Downloads

### General

Neutral Density Filter **Type:**

### Physical & Mechanical Properties

100.0 x 300.0 (Nominal) **Dimensions (mm):**

300.00 **Length (mm):**

100.00 **Width (mm):**

## Optical Properties

0.6 **Optical Density OD (Average):**

Wratten 2 **Substrate:**

Uncoated **Coating:**

25.00 **Transmission (%):**

400 - 700 **Blocking Wavelength Range (nm):**

## Regulatory Compliance

**Compliant** **RoHS 2015:**

**Compliant** **Reach 223:**

**View** **Certificate of Conformance:**

## Product Details


Storage in humid environments can cause the filters to cloud and temperatures should not exceed 50°C for extended periods. Every 0.3 density increment equals one f-stop.

- Available in Large Sizes
- Easily Cut for Custom Sizing
- Kodak Filter No. 96

Kodak Wratten 2 Neutral Density Filters are used in image forming optical systems to reduce light intensity across the visible spectrum without altering the spectral profile. These ND filters feature tolerances of  $\pm 10\%$  of the nominal diffuse density. Although the filters transmit the infrared spectrum, neutrality is controlled only in the visible spectrum. Kodak Wratten 2 Neutral Density Filters are uncoated and have a blocking wavelength range of 400-700nm. All ND filters are 0.1mm in thickness and can be cut for easy custom sizing.

**Note:** Storage in humid environments can cause the filters to cloud and temperatures should not exceed 50°C for extended periods. Every 0.3 density increment equals one f-stop.

## Technical Information

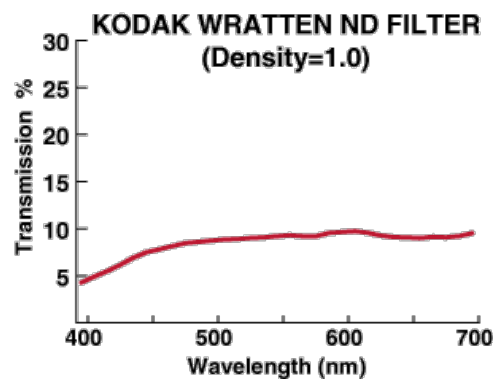

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools