


[See all 3 Products in Family](#)

TECHSPEC® 25.4mm Enhanced Aluminum Coated $\lambda/10$ Knife-Edge Pickoff Mirror

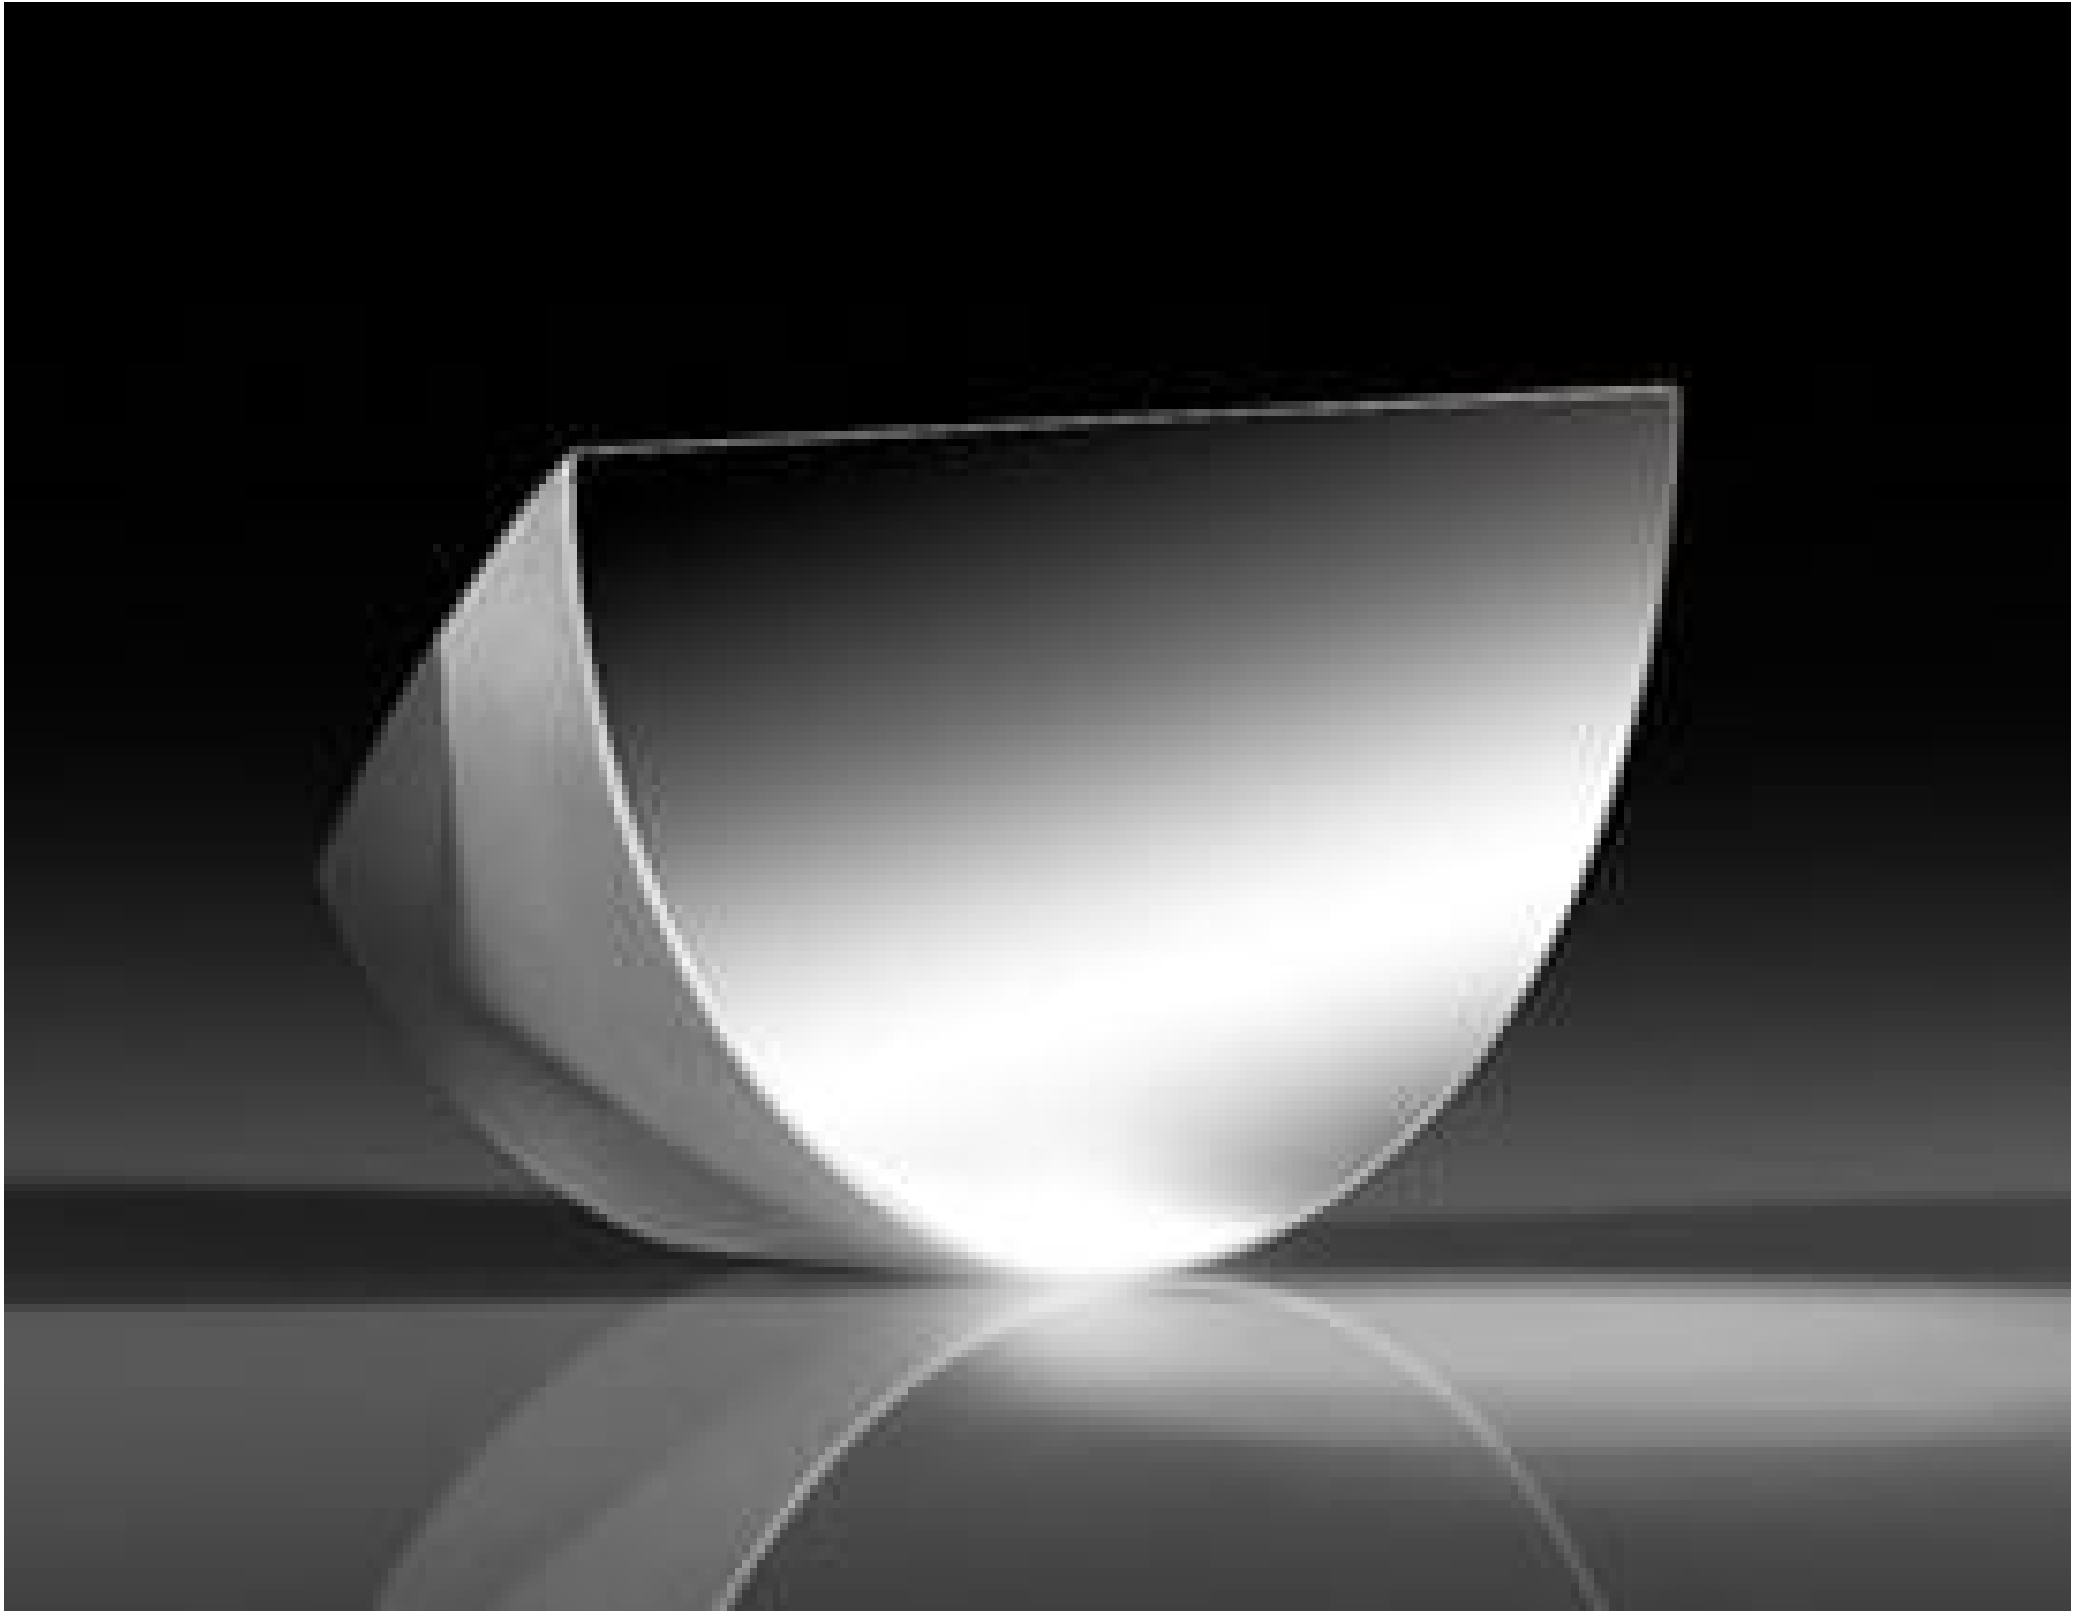

25.4mm Enhanced Aluminum Coated $\lambda/10$ D-Shaped Pickoff Mirror, #36-135

Stock **#36-135** **4 In Stock**

⊖ 1 ⊕ **A\$143⁰⁰**

ADD TO CART

Volume Pricing	
Qty 1-5	A\$143.20 each
Qty 6-25	A\$129.60 each
Qty 26+	A\$114.40 each
Need More?	Request Quote

Product Downloads

General

Flat Mirror **Type:**

Physical & Mechanical Properties

25.40 **Diameter (mm):**

6.35 ±0.20 **Thickness (mm):**

Fine Grind	Back Surface:
Protective as needed	Bevel:
Dimensional Tolerance (mm):	
+0.0/-0.20	
Ground	Edges:
Parallelism (arcmin):	
2	

Optical Properties

Metal	Coating Type:
Enhanced Aluminum (450-650nm)	Coating:
M10	Surface Flatness (P-V):
450 - 650	Wavelength Range (nm):
Fused Silica (Coming 7980)	Substrate: <input type="checkbox"/>
R _{avg} >95% @450 - 650nm	Coating Specification:
20-10	Surface Quality:
0.2 J/cm ² @532nm, 10ns	Damage Threshold, Reference: <input type="checkbox"/>

Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 247:

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume


Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Product Details

- Designed to Separate Two Beams Propagating Closely Next to Each Other
- 45° Bevel
- Coating Aperture Up to the Knife-Edge
- Enhanced Aluminum, Protected Gold and Protected Silver Coating Options

Knife-Edge Pickoff Mirrors are designed to selectively reflect an individual beam from a group of tightly spaced beams, while minimizing the overall footprint of the application. These mirrors feature a sharp 45° bevel with a reflective coating that extends to the beveled edge on a precision Fused Silica substrate with M10 flatness to the bevel. Knife-Edge Pickoff Mirrors are ideal for applications that incorporate dispersion prisms and diffraction gratings. These mirrors are available in three metallic coating options with performance from the visible spectrum into the far IR.

Technical Information

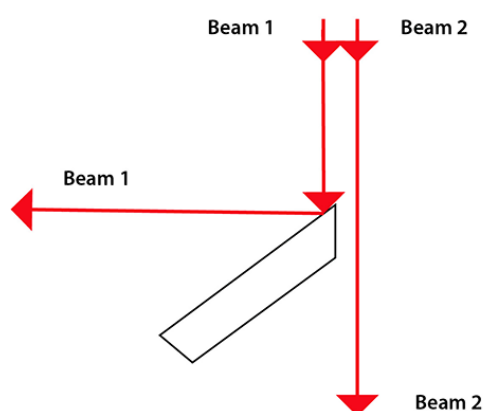

Coating Curves
