TECHSPEC 50mm UV Enhanced Aluminum Coated, N-BK7 Right Angle Prism

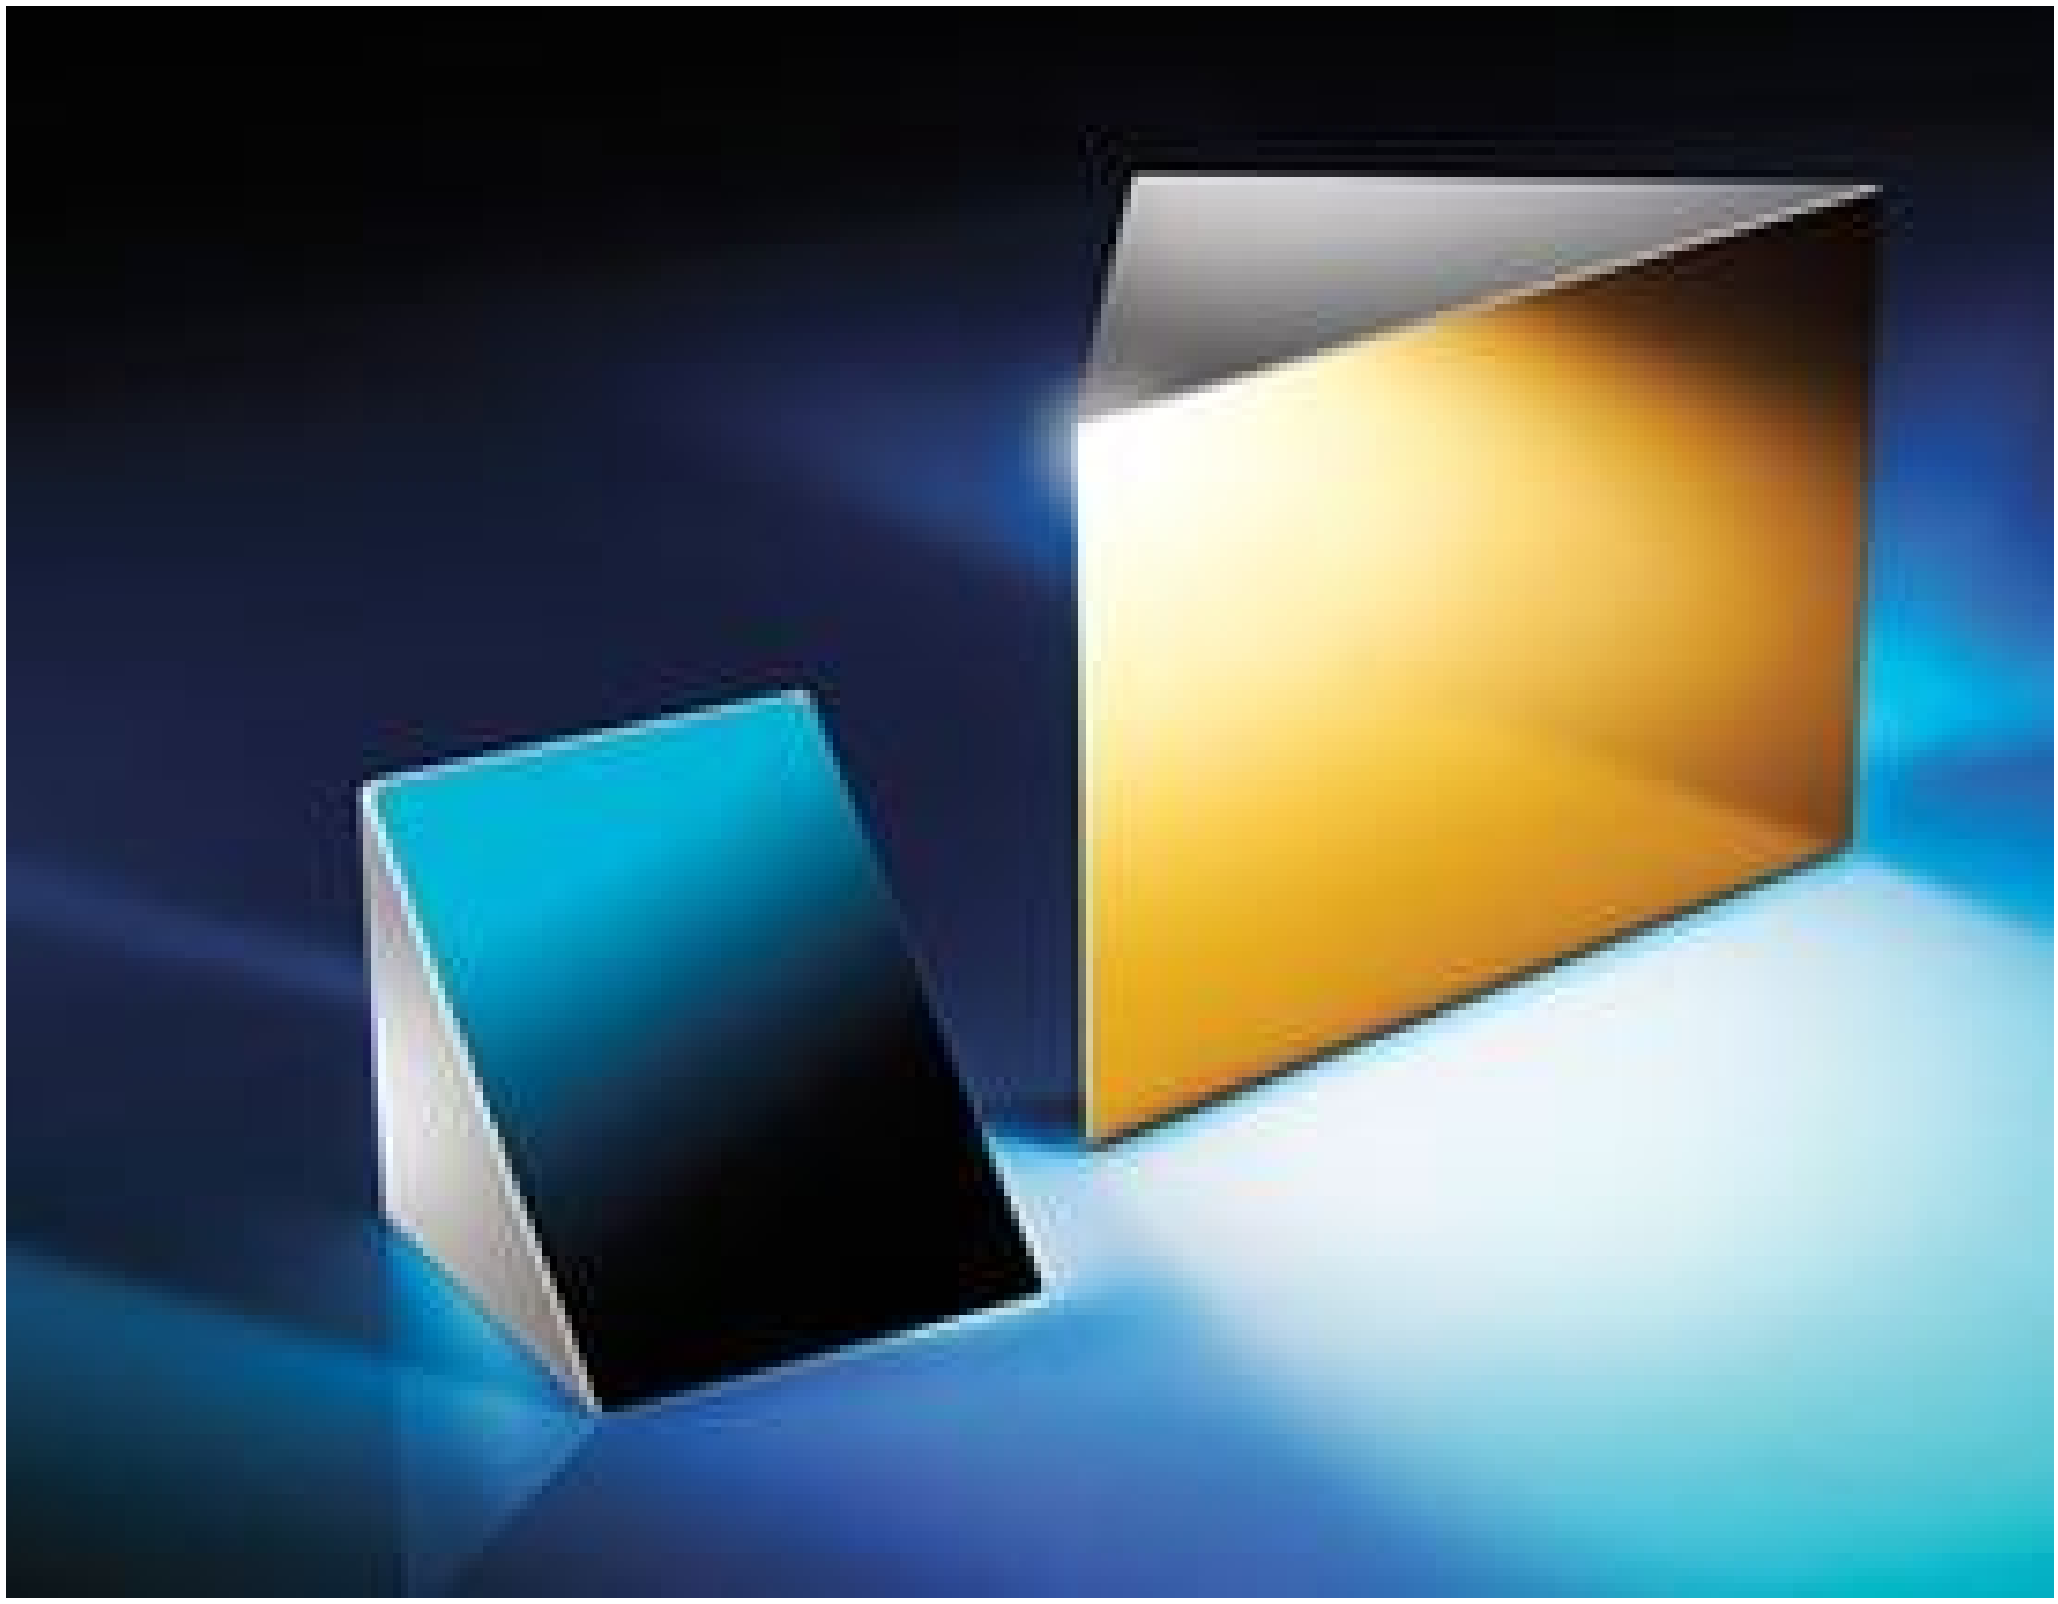

Stock **#24-186** 3-5 DAYS

- 1 + **A$432.00**

ADD TO CART

Qty 1-5
A$432.00

Qty 6+
A$345.60

Volume Pricing
Request Quote

Get Product Downloads

CUSTOM OPTIONS

Substrate:
N-BK7

Surface Quality:
60-40

Length of Legs (mm):
50.00

Dimensional Tolerance (mm):

±0.1

Coating Specification:
R_{avg} >85% @ 250 - 700nm
R_{avg} >89% @ 250 - 450nm

Coating:
Enhanced Aluminum (250-700nm)

Coating Type:
Metal

Angle Tolerance (arcmin):
±2

Bevel:
Protective bevel as needed

Clear Aperture CA (mm):
63.64 x 45.00

Length of Hypotenuse (mm):
70.70

Type:
Right Angle Mirror

Wavelength Range (µm):
0.25 - 0.7

Wavelength Range (nm):
250 - 700

Damage Threshold, Reference:
0.5 J/cm^2 @ 355nm, 10ns

Power (fringes) @ 632.8nm:
1.25

Irregularity (fringes) @ 632.8nm:
0.50

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 235:
Compliant