


[See all 47 Products in Family](#)

## Microlens Array 10 x 10mm, 300µm Pitch, 0.5° Divergence, VIS 0° Coated



Microlens Arrays

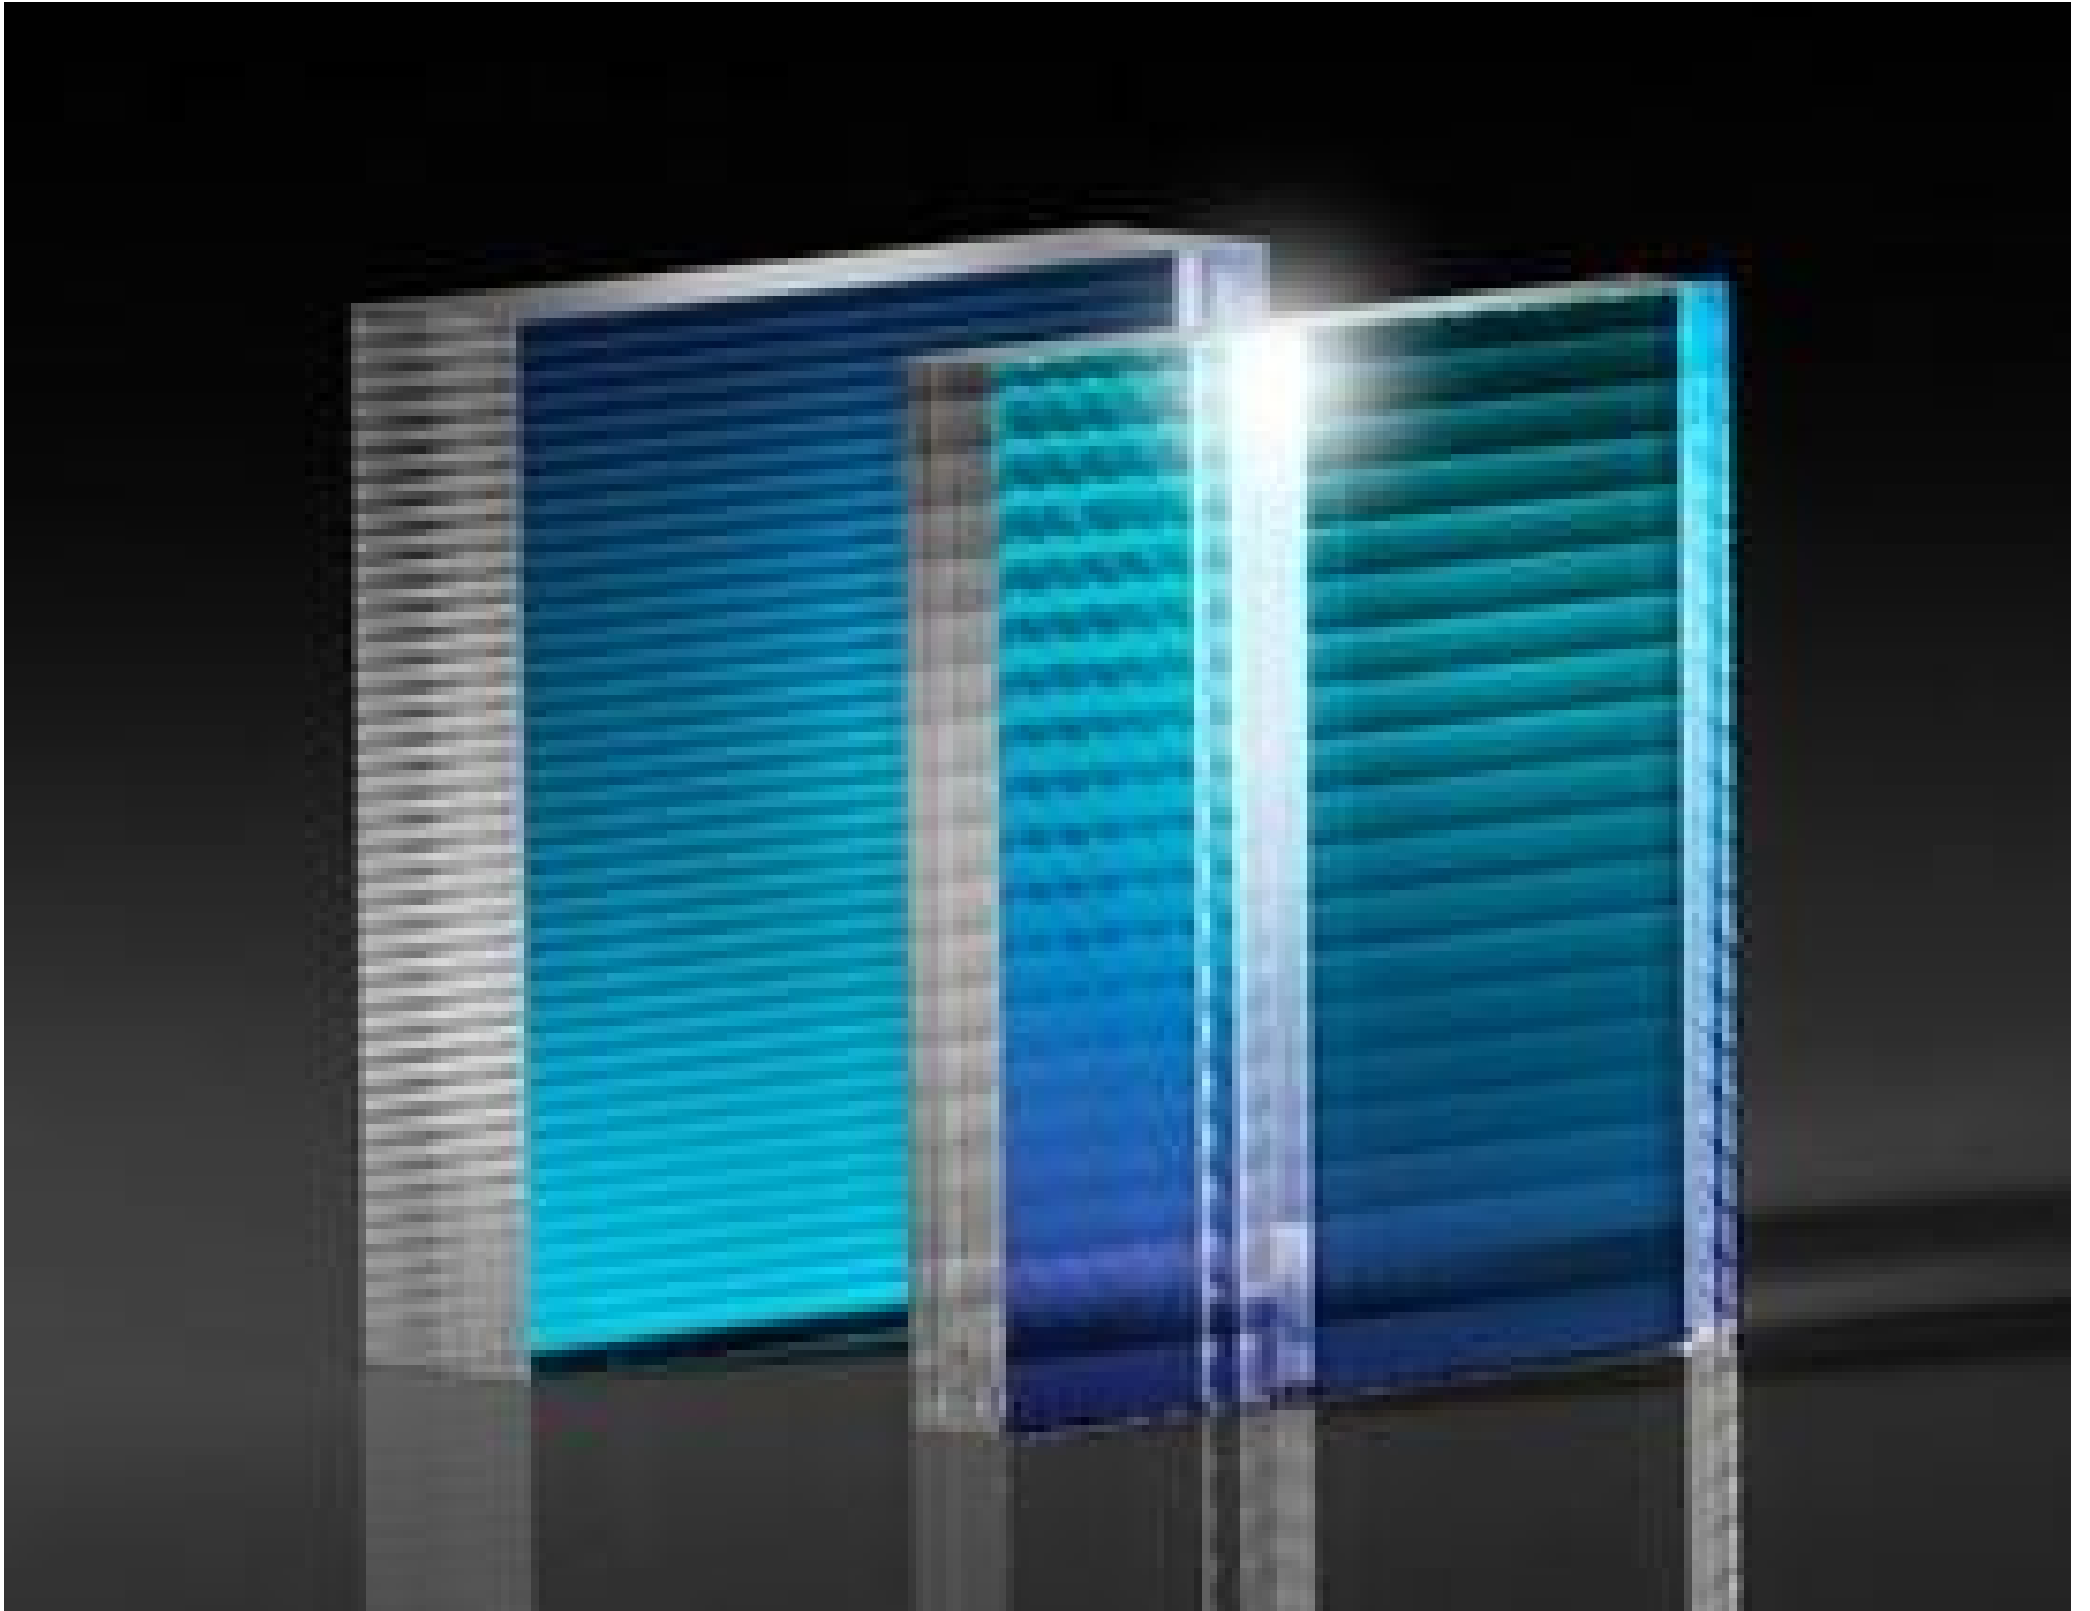

Stock #72-243 [CONTACT US](#)

- 1 + A\$1,498<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-10	A\$1,498.00 each
Qty 11-25	A\$1,354.00 each
Qty 26-49	A\$1,275.00 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

### General

Lens Array **Type:**

Spherical **Lens Profile:**

Plano-Convex **Type of Optics:**

## Physical & Mechanical Properties

9.00 x 9.00 **Clear Aperture CA (mm):**

±0.05 **Dimensional Tolerance (mm):**

10.0 x 10.0 **Dimensions (mm):**

8.60 **Radius R (mm):**

1.20 ±0.05 **Thickness (mm):**

## Optical Properties

18.80 **Effective Focal Length EFL (mm):**

Fused Silica (Corning 7980) **Substrate:**

VIS 0° (425-675nm) **Coating:**

425 - 675 **Wavelength Range (nm):**

$R_{avg} \leq 0.4\%$  @ 425 - 675nm **Coating Specification:**

±0.5 **Divergence Angle (°):**

300.00 ±0.25 **Pitch (µm):**

## Regulatory Compliance

[View](#) **Certificate of Conformance:**

## Product Details

- Square Lens and Fly's Eye Configurations
- Precision Fused Silica Substrates

Micro lens arrays are useful for homogenizing a variety of modern light emitters from line-narrowed excimer lasers to high power LEDs. Micro lenses are well suited for applications that require high efficiency and non-gaussian uniformity. All micro lens arrays are constructed from UV-grade fused silica, offering exceptional performance from 200nm to 2.5µm. The micro lens arrays are manufactured using standard semiconductor technologies, yielding very accurate shaping of the lens profile and precise positioning of the lenses within an array. We offer our arrays in two configurations:

### Square Micro lens Arrays



Our square arrays are available in a standard 10mm x 10mm configuration in a variety of lens pitch and focal length options. Square micro lenses are commonly used for beam homogenization and shaping, yielding spot patterns or a square flat-top pattern. The lenses feature a high fill factor which eliminates zero-order hot spots in the illuminated field. Square lenses are often used in pairs, in conjunction with a PCX lens (see above). Typical applications include welding, drilling, laser ablation, and fiber coupling.

### Fly's Eye Condenser Arrays

Our fly's eye condensers are available in 5 and 10mm square configurations, and are designed for flat-top and line generation. The condenser arrays are a monolithic assembly of dual-surface cylindrical micro lenses, creating condensers which are completely free of adjustment. These micro lenses are commonly used in applications requiring a large illuminated field with a short working distance, such as medical laser use, solar simulation, UV-curing, semiconductor instrumentation and fluorescence microscopy.



## Technical Information

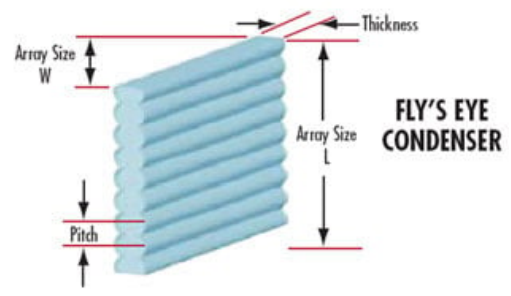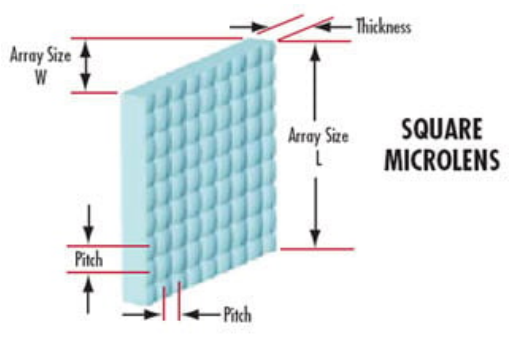

## Coating Curves